

# HTML Basic Examples

تهیه و تنظیم: بابک آشفته یزدی

## HTML Template

```
<html>
<head>
<title>My First Web Page</title>
</head>
<body>

</body>
</html>
```

← شروع یک فایل HTML  
← اطلاعات سربرگ می باشد و در پنجره مرورگر نمایش داده نمی شود  
← عنوان سربرگ می باشد و در پنجره مرورگر نمایش داده می شود  
← پایان اطلاعات سربرگ  
← این متن توسط مرورگر نشان داده خواهد شد  
← پایان یک فایل HTML

**<p>,</p>**

## Paragraph

```
<html>
<head>
<title>My First Web Page</title>
</head>
<body>

<p>Here is some text that will appear in the body of my Web
page.</p>

<p>The second paragraph</p>

<p>The third paragraph</p>

<p>And so on...</p>

</body>
</html>
```

Here is some text that will appear in the body of my Web page.  
The second paragraph  
The third paragraph  
And so on...

**<p align=".....">**

## Left,Right,Center,Justify

- "left" - text aligned to the left margin
- "right" - text aligned to the right margin
- "center"- text centred
- "justify" - text aligned evenly to both the right and left margins

```
<html>
<head>
<title>My First Web Page</title>
</head>
<body>
<p align=left>And so on...</p>
<p align=right>And so on...</p>
<p align=center>And so on...</p>
<p align=justify>And so on...</p>
</body>
</html>
```

And so on...  
And so on...  
And so on...  
And so on...

**<b>,<i>,<u>**

**Bold,Italic,Undeline**

```
<html>
<head>
<title>My First Web Page</title>
</head>
<body>
```

<p>This line of text has a number of formatting features including <b>bold</b>, <i>italic</i> and <u>underline</u></p>

<p>You can even <b><i>mix</i></b> many formatting features together!</p>

```
</body>
</html>
```

This line of text has a number of formatting features including **bold**, *italic* and underline  
You can even *mix* many formatting features together!

**<br>**

**Break Line**

```
<html>
<head>
<title>MyHome Page</title>
</head>
<body>
First line...<br> break for next
line<br><br>The third line
</body>
</html>
```

First line...<br> break for next  
line<br><br>The third line

First line...  
break for next line  
  
The third line

**<h1>...<h6>**

**Text Size**

```
<html>
<body>
<h1>This is a heading</h1>
<h2>This is a heading</h2>
<h3>This is a heading</h3>
<h4>This is a heading</h4>
<h5>This is a heading</h5>
<h6>This is a heading</h6>
</body>
</html>
```

**This is a heading**

**This is a heading**

**This is a heading**

**This is a heading**

**This is a heading**

**This is a heading**

```
<html>
<body>
<p>This is a paragraph</p>
<!-- This is a comment -->
<p>This is another paragraph</p>
</html>
</body>
```

**<!-- -->**

**The Comment**

This is a paragraph  
This is another paragraph

<hr>

## Horizontal Line

```
<html>
<body>
<p>
The hr tag defines a horizontal rule:
<hr>
This is a paragraph
</p>
</body>
</html>
```

The hr tag defines a horizontal rule:-

-----  
This is a paragraph

```
<html>
<body>
<b>This text is bold</b><br>
<strong>This text is strong</strong><br>
<big>This text is big</big><br>
<small>This text is small</small><br>
<em>This text is emphasized</em><br>
<i>This text is italic</i><br>
This text contains<sub>subscript</sub><br>
This text contains<sup>superscript</sup><br>
<ins>This text is inserted</ins><br>
<del>This text is deleted</del><br>
</body>
</html>
```

<big>,<em>,<small>,<strong>,<sub>,<sup>,<ins>,<del>

**This text is bold**  
**This text is strong**  
This text is big  
This text is small  
*This text is emphasized*  
*This text is italic*  
This text contains<sub>subscript</sub>  
This text contains<sup>superscript</sup>  
This text is inserted  
This text is deleted

<code>,<kbd>,<tt>,<samp>,<var>

## Computer code,Keyboard input,Teletype,Sample,Variable text

```
<html>
<body>
<code>Computer code</code><br>
<kbd>Keyboard input</kbd><br>
<tt>Teletype text</tt><br>
<samp>Sample text</samp><br>
<var>Computer variable</var>
</body>
</html>
```

Computer code  
**Keyboard input**  
Teletype text  
Sample text  
*Computer variable*

<pre>

## Preformatted Text

```
<html>
<body>
<pre>
This is
preformatted text.
It preserves both spaces
and line breaks.
for i = 1 to 10
print i
next i
</pre>
</body>
</html>
```

```
This is
preformatted text.
It preserves both spaces
and line breaks.
for i = 1 to 10
print i
next i
```

<abbr>,<acronym>

**Abbrivation ,Acronym**

```
<html>
<body>
<abbr title="Pakdairy company">PAK</abbr><p>
<acronym title="Pak Co. Website" >www.pakdairy.com</
acronym>
</body>
</html>
```



<address>

**Address Text Format**


```
<html>
<body>
<address>
Pak Co.<br>
BOX 16455-53367<br>
Old Karaj Road<br>
Tehran,Iran
</address>
</body>
</html>
```



<bdo dir="rtl" >

**Hebrew Text**


```
<html>
<body>
<bdo dir="rtl">
Here is some Hebrew text
</bdo>
</body>
</html>
```

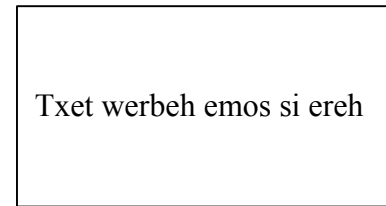

<blockquote>

**Hebrew Text**


```
<html>
<body>
Here comes a long quotation:
<blockquote>
This is a long quotation.This is a<br>
long quotation. This is a long<br>
quotation.This is a long quotation.
</blockquote>
Here comes a short quotation:<br>
This is a short quotation
</body>
</html>
```

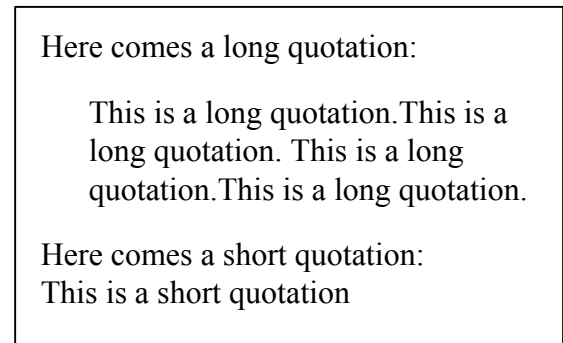

<cite>,<dfn>

**Citation=Definition**

```
<html>
<body>
<h2><cite>This is a citation term</cite>
<br>
<dfn>This is a definition term</dfn>
</body>
</html>
```

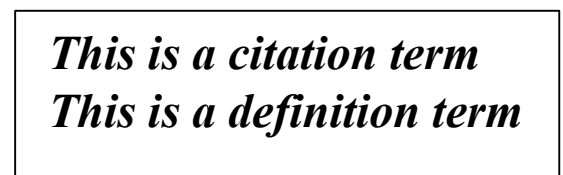

```
<html>
<body>
<p><b>
&lt;b&gt;This text is bold&lt;/b&gt;
<br>
&#60;b&#62;This text is bold&#60;/b&#62;
</body>
</html>
```

**<b>This text is bold</b>**  
**<b>This text is bold</b>**

عدد نهادی	نام نهادی	نام حرف	نتیجه
&#160;	&nbsp;	non-breaking space	
&#60;	&lt;	less than	<
&#62;	&gt;	greater than	>
&#38;	&amp;	ampersand	&
&#34;	&quot;	quotation mark	"
&#39;		apostrophe	'
&#161;	&iexcl;	inverted exclamation mark	.
&#162;	&cent;	cent	¢
&#163;	&pound;	pound	£
&#165;	&yen;	yen	¥
&#169;	&copy;	copyright	©
&#171;	&laquo;	angle quotation mark (left)	«
&#174;	&reg;	registered trademark	®
&#176;	&deg;	degree	°
&#177;	&plusmn;	plus-or-minus	±
&#178;	&sup2;	superscript 2	²
&#179;	&sup3;	superscript 3	³
&#181;	&micro;	micro	µ
&#185;	&sup1;	superscript 1	¹
&#187;	&raquo;	angle quotation mark (right)	»
&#188;	&frac14;	fraction 1/4	¼
&#189;	&frac12;	fraction 1/2	½
&#190;	&frac34;	fraction 3/4	¾
&#191;	&iquest;	inverted question mark	.
&#215;	&times;	multiplication	×
&#247;	&divide;	division	÷
















**<body bgcolor= >**  
**RGB,Hex,Name**

```
<html>
<body bgcolor="#FFFF00">
<p>The Background Color Is Yellow</p>
</body>
</html>
```

The Background Color Is Yellow

```
<body bgcolor="#FFFF00">
<body bgcolor="rgb(255,255,0)">
<body bgcolor="yellow">
```

## Colors In HTML

RGB Color	Hex Color	Name Color	Color
rgb(0,0,0)	#000000	black	
rgb(255,0,0)	#FF0000	red	
rgb(0,255,0)	#00FF00	lime	
rgb(0,0,255)	#0000FF	blue	
rgb(255,255,0)	#FFFF00	yellow	
rgb(0,255,255)	#00FFFF	aqua	
rgb(255,0,255)	#FF00FF	fuchsia	
rgb(192,192,192)	#C0C0C0	silver	
rgb(255,255,255)	#FFFFFF	white	
RGB(0,0,0)	#000000		
RGB(64,64,64)	#404040		
RGB(128,128,128)	#808080		
RGB(192,192,192)	#C0C0C0		
RGB(232,232,232)	#E8E8E8		
RGB(255,255,255)	#FFFFFF		

**<font >**  
**Size,Face,Color**

size="number"	size="2"	اندازه فونت را تعیین می کند
size="+number"	size="+1"	فونت را بزرگتر می کند
size="-number"	size="-1"	فونت را کوچکتر می کند
face="face-name"	face="Times"	نام فونت را تعیین می کند
color="color-value"	color="#eef00"	شماره رنگ فونت را تعیین می کند
color="color-name"	color="red"	نام رنگ فونت را تعیین می کند

```

<html>
<body>
<p>
<font size="2" face="Verdana" color="#ff00ff">
This is a paragraph.
</font>
<p>
<font size="5" face="Times" color="blue">
This is another paragraph.
<p>
<font size="+3" face="Times" color="green">
This is another paragraph.
</font>
<p>
<font size="3" >
This is another paragraph.
</font>
</body>
</html>

```

This is a paragraph.

This is another paragraph.

This is another paragraph.

This is another paragraph.

**<a href >...</a>**  
**Anchor Hyperlink**

یک لینک می تواند به هر منبعی در وب اشاره داشته باشد: یک صفحه HTML دیگر، یک تصویر، یک موزیک، یک فیلم یا هر چیز دیگری

```
<html>
<body>
<a href="http://www.yahoo.com/">Visit YAHOO!</a><p>
<a href="http://www.google.com/">Visit Google!</a>
</body>
</html>
```



**<a href >...</a>**  
**Target**

```
<html>
<body>
<a href="http://www.yahoo.com/"
target="_blank">Visit YAHOO!</a>
</body>
</html>
```

یک فایل یا آدرس جدید را در یک پنجره جدید باز خواهد کرد. target="\_blank"  
یک فایل یا آدرس جدید را در پنجره فعلی باز خواهد کرد. target="\_self"  
یک فایل یا آدرس جدید را در قاب اصلی باز خواهد کرد. target="\_parent"  
یک فایل یا آدرس جدید را در کل پنجره فعلی باز خواهد کرد. target="\_top"

**<a name >...</a>**



مشخصه name برای ساختن یک لینک دارای نام استفاده می شود. توسط لینک دارای نام شما می توانید لینکی بسازید که به قسمت خاصی از صفحه مستقیماً جهش داشته باشد به جای این که کار بر را مجبور به پیمودن صفحه کنید تا به قسمت مورد نظر برسد هنگامی که می خواهید به یک لینک دارای نام متصل شوید باید به انتهای نام فایل علامت # را اضافه کرده سپس نام لینک مورد نظر را بنویسید.

```
<html>
<head>
<title>Test1.html</title>
</head>
<body>
<p>This is a text. This is a text. This is a text.</p>
<p>This is a text. This is a text. This is a text.</p>
<a name="tips">Read the Useful Tips section</a>
<p>This is a text. This is a text. This is a text.</p>
<p>This is a text. This is a text. This is a text.</p>
</body>
</html>
```

دستورات را در فایل به نام test1.html ذخیره کنید

```
<html>
<head>
</head>
<body>
<title>Test2.html</title>
<a href="test1.html#tips">
Read the Useful Tips section</a>
</body>
</html>
```

دستورات را در فایل به نام test2.html ذخیره کنید سپس فایل test2.html را اجرا نمایید.

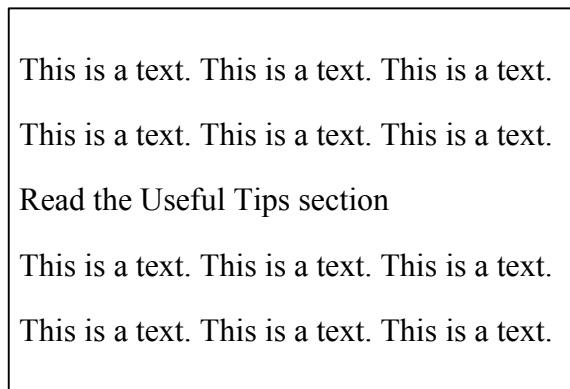



## Insert Email Address

```
<html>
<head>
</head>
<body>
<p>My E-Mail adress is : bab_ashofteh@yahoo.com</p>
</body>
</html>
```


My E-Mail adress is : bab\_ashofteh@yahoo.com

---

## Insert Email Address to Outlook

```
<html>
<head>
</head>
<body>
<a href="mailto: you@yourname.com?Subject=Hello%20again">Send Mail</a>
</body>
</html>
```


Send Mail

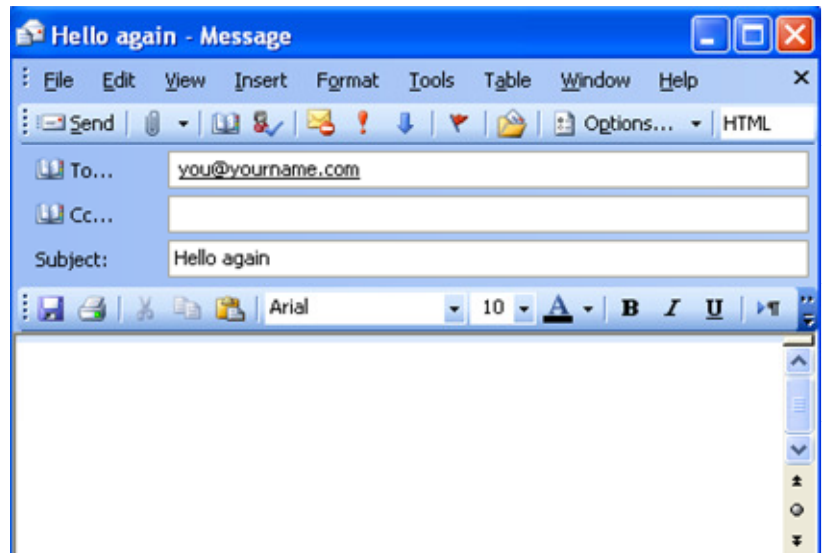

```
<html>
<body>
<p>This is a mailto link:
<a href="mailto:
elearning@tehranedu.org?cc=someoneelse@tehranedu.org&
bcc=andsomeoneelse2@tehranedu.org&
subject=Conference&
body=You%20are%20invited%20to%20a%20big%20Conference!">
Send mail!</a>
</p>
```

```
<body>
<html>
```

This is a mailto link: [Send mail!](#)

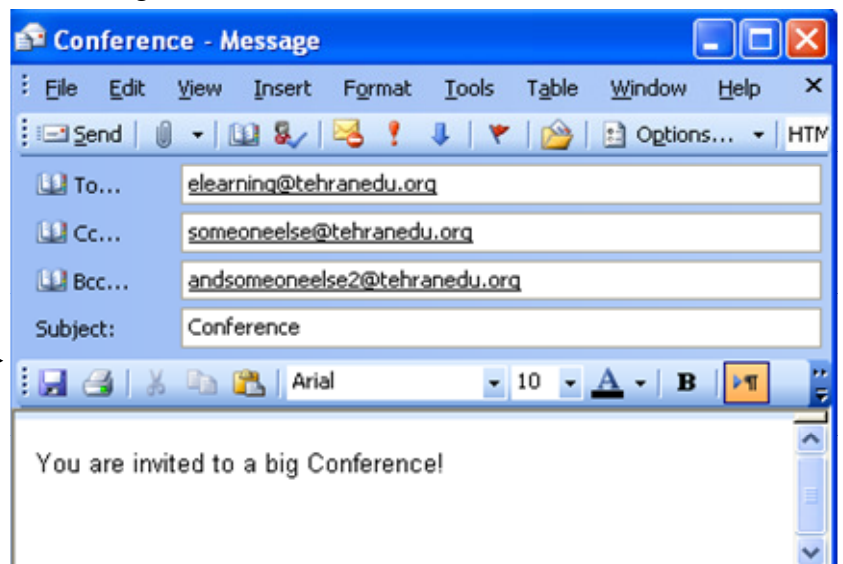

**<img src >**

**Image Screen**

```
<html>  
<body>  
  
</body>  
</html>
```




```
<html>  
<body>  
  
</body>  
</html>
```



**<img src >**

**Width,Height,Alt**

```
<html>  
<body>  
  
</body>  
</html>
```




```
<html>  
<body>  
  
</body>  
</html>
```



<img src >

Align (Left,Right,Middle,Top,Bottom)


```
<html>
<head>
<title>Enter_Title_Here</title>
</head>
<body>
<img src ="1.jpg" width=100 height=100 align
="left" >
The picture is in the left side
</body>
</html>
```

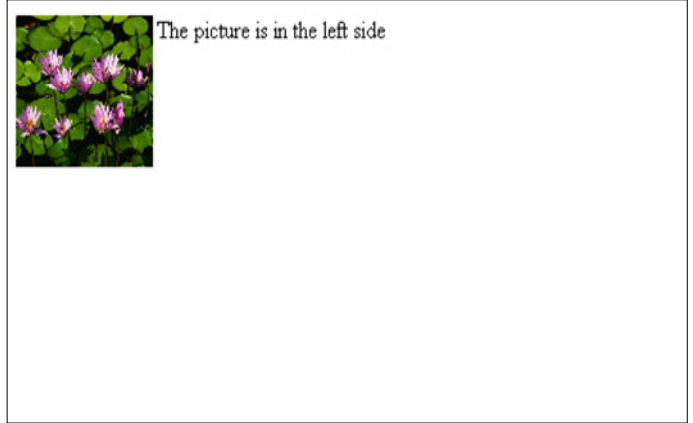

```
<html>
<head>
<title>Enter_Title_Here</title>
</head>
<body>
<img src ="1.jpg" width=100 height=100 align
="right" >
The picture is in the right side
</body>
</html>
```



```
<html>
<head>
<title>Enter_Title_Here</title>
</head>
<body>
An Image <img src ="1.jpg" width=100
height=100 align ="right" >
in the middle of text
</body>
</html>
```

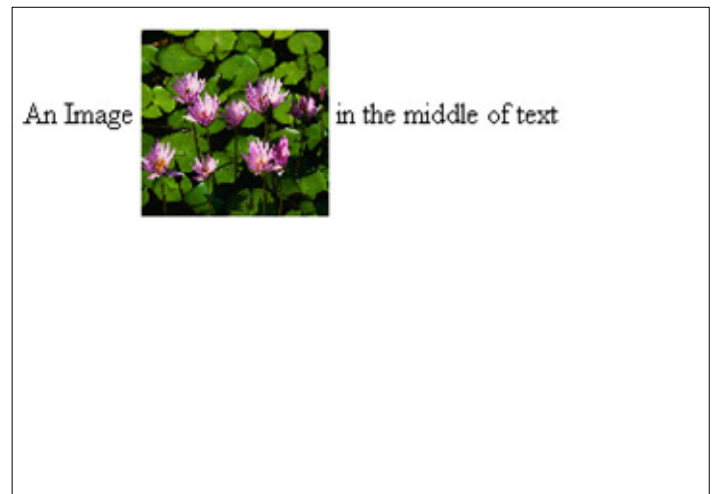

```
<html>
<head>
<title>Enter_Title_Here</title>
</head>
<body>
<img src ="1.jpg" width=100 height=100 align
="top" >
text in the top of image
</body>
</html>
```



تصاویر به طور پیش فرض به صورت align="bottom" قرار خواهند گرفت.

**<body background >**

### Background Image

```
<HTML>
<HEAD>
<TITLE>My Home Page</TITLE>
</HEAD>
<BODY
background="sunset.jpg">
My Home Page
</BODY>
</HTML>
```





**<a href= ><img src= >**

```
<a href="nextpage.htm"></a>
```

```
<HTML>
<HEAD>
</HEAD>
<BODY>
<a href="1.jpg">
Click on the image.or text

</BODY>
</HTML>
```

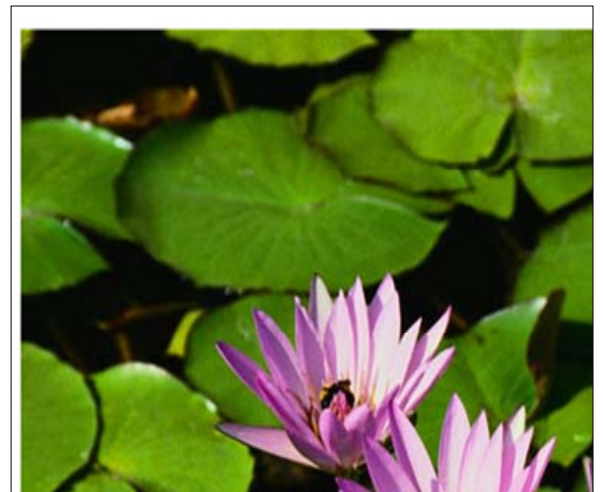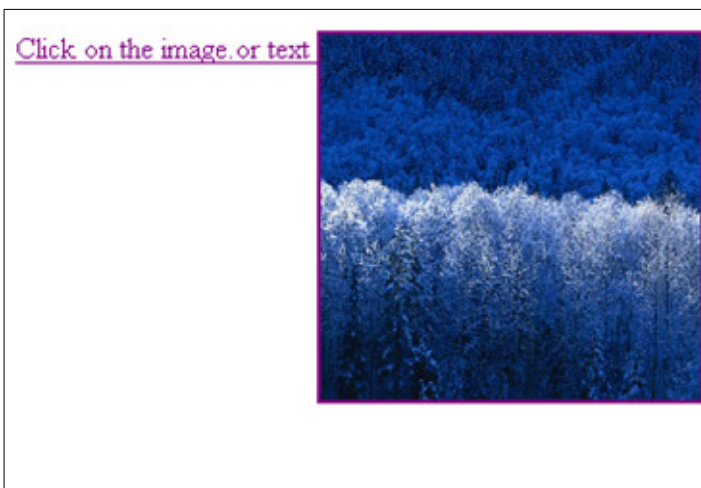

**<table>**

### Table In HTML

جدول ها در HTML توسط برچسب <table> ایجاد می شوند. یک جدول توسط برچسب <tr> به سطرها تقسیم می شود و هر سطر توسط برچسب <td> به خانه های اطلاعاتی تقسیم می شود. یک خانه اطلاعاتی متواند شامل متن، تصویر، فهرست، پاراگراف، فرم، جدول و یا هر چیز دیگری باشد.

ضخامت حاشیه توسط مشخصه "border="number" تعیین میشود.

## <table border=>

### Table In HTML

```
<body>
<table border="3">
<tr>
<td>row 1, cell 1</td>
<td>row 1, cell 2</td>
</tr>
<tr>
<td>row 2, cell 1</td>
<td>row 2, cell 2</td>
</tr>
</table>
</body>
</html>
```

row 1, cell 1	row 1, cell 2
row 2, cell 1	row 2, cell 2

## <th>

### Title in Table

```
<html>
<body>
<table border="1">
<tr>
<th>Heading</th>
<th>Another Heading</th>
</tr>
<tr>
<td>row 1, cell 1</td>
<td>row 1, cell 2</td>
</tr>
<tr>
<td>row 2, cell 1</td>
<td>row 2, cell 2</td>
</tr>
</table>
</body>
</html>
```

Heading	Another Heading
row 1, cell 1	row 1, cell 2
row 2, cell 1	row 2, cell 2

## <caption>

### Caption in Table

```
<html>
<body>
<table border="1">
<caption>Caption</caption>
<tr>
<td>row 1, cell 1</td>
<td>row 1, cell 2</td>
</tr>
<tr>
<td>row 2, cell 1</td>
<td>row 2, cell 2</td>
</tr>
</table>
</body>
</html>
```

row 1, cell 1	row 1, cell 2
row 2, cell 1	row 2, cell 2

<td>&nbsp;</td>

```
<html>
<body>
<table border="1">
<caption>Caption</caption>
<tr>
<td>row 1, cell 1</td>
<td>row 1, cell 2</td>
</tr>
<tr>
<td>row 2, cell 1</td>
<td>&nbsp;</td>
</tr>
</table>
</body>
</html>
```

row 1, cell 1	row 1, cell 2
row 2, cell 1	

<th colspan=" " ">

```
<html>
<body>
<table border="1">
<tr>
<th>Name</th>
<th colspan="3">Telephone</th>
</tr>
<tr>
<td>Baby Max</td>
<td>555 77 854</td>
<td>555 77 855</td>
<td>555 77 856</td>
</tr>
</table>
</body>
</html>
```

Name	Telephone		
Baby Max	555 77 854	555 77 855	555 77 856


<th rowspan=" " ">

```
<html>
<body>
<table border="1">
<tr>
<th>First Name:</th>
<td>Bill Gates</td>
</tr>
<tr>
<th rowspan="3">Telephone:</th>
<td>555 77 854</td>
</tr>
<tr>
<td>555 77 855</td>
</tr>
<tr>
<td>555 77 856</td>
</tr>
</table>
</body>
</html>
```

First Name:	Bill Gates
Telephone:	555 77 854
	555 77 855
	555 77 856

**<table cellpadding=" " >**


```
<html>
<body>
<table border="1" cellpadding="30">
<tr><td>First</td>
<td>Row</td>
</tr>
<tr>
<td>Second</td>
<td>Row</td>
</tr>
</table>
</body>
</html>
```

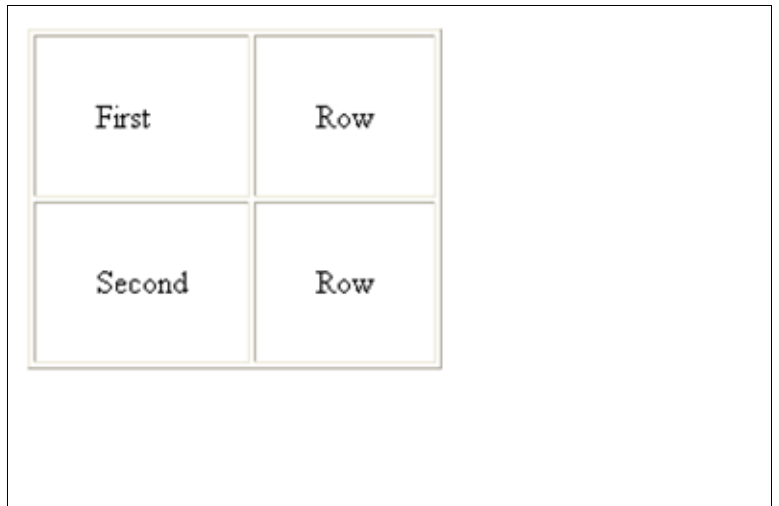

First	Row
Second	Row

**<table cellspacing=" " >**

```
<html>
<body>
<table border="1" cellspacing="30">
<tr><td>First</td>
<td>Row</td>
</tr>
<tr>
<td>Second</td>
<td>Row</td>
</tr>
</table>
</body>
</html>
```

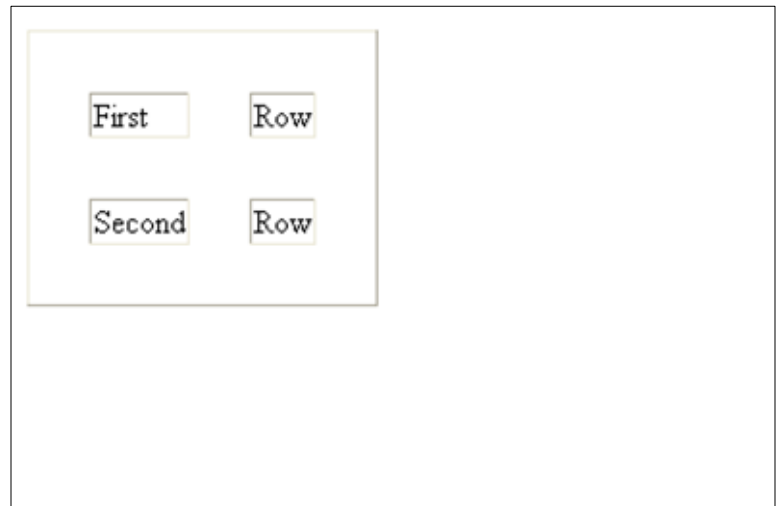


First	Row
Second	Row

**<table bgcolor=" " >**

**<td bgcolor=" " >**

```
<html>
<body>
<table border="1" bgcolor="red" cellpadding=20>
<tr>
<td bgcolor="#00ff00">First</td>
<td>Row</td>
</tr>
<tr>
<td>Second</td>
<td>Row</td></tr>
</table>
</body>
</html>
```

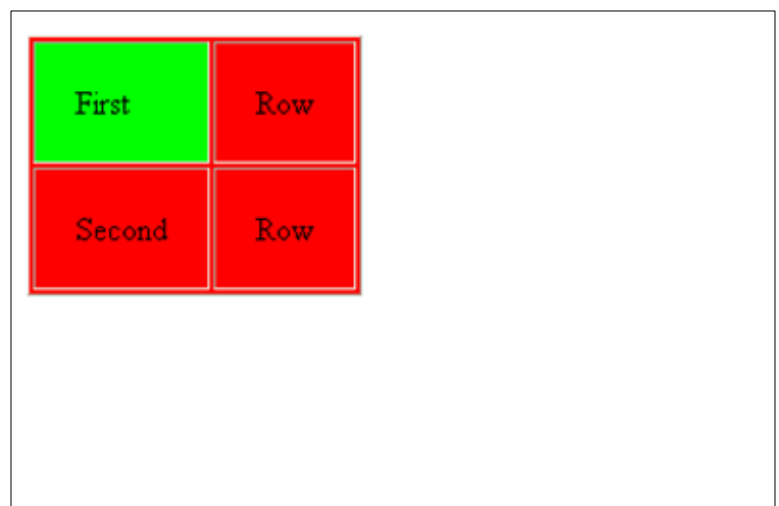


First	Row
Second	Row

**<table height=" " ,width=" " ,background=" ">**

**<td background=" ">**


```
<html>
<body>
<table border="1" height="200"
width="200" background="sunset.jpg"
cellpadding=50>
<tr>
<td background="winter.jpg">First</td>
<td>Row</td>
</tr>
<tr>
<td>Second</td>
<td>Row</td></tr>
</table>
</body>
</html>
```

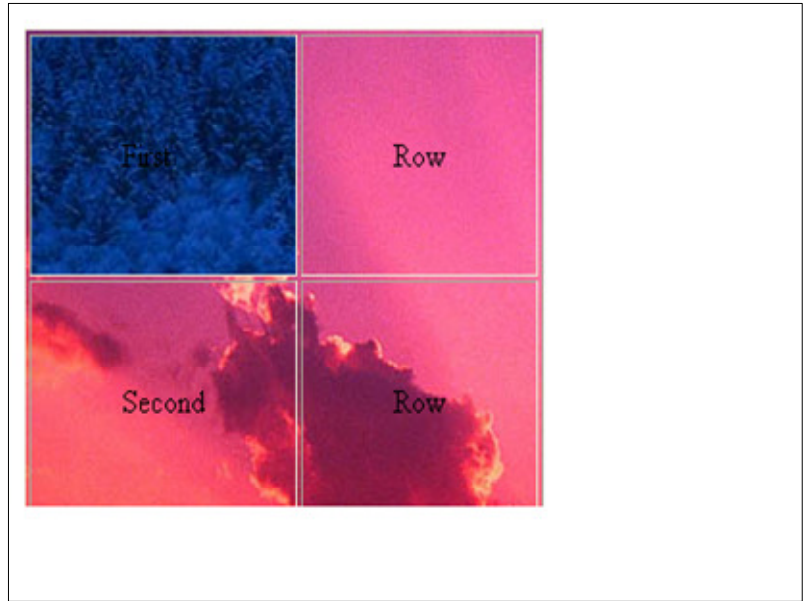

```
<html>
<body>
<table border="1" height="300"
width="400">
<tr>
<td align="left" >First</td>
<td align="center" >Second</td>
<td align="right" >Third</td>
</tr>
<tr>
<td valign="top" >First</td>
<td valign="middle" >Second</td>
<td valign="bottom" >Third</td>
</tr>
</table>
</body>
</html>
```

**<td align=left,center,right,justify>**

**<td valign top,middle,bottom>**

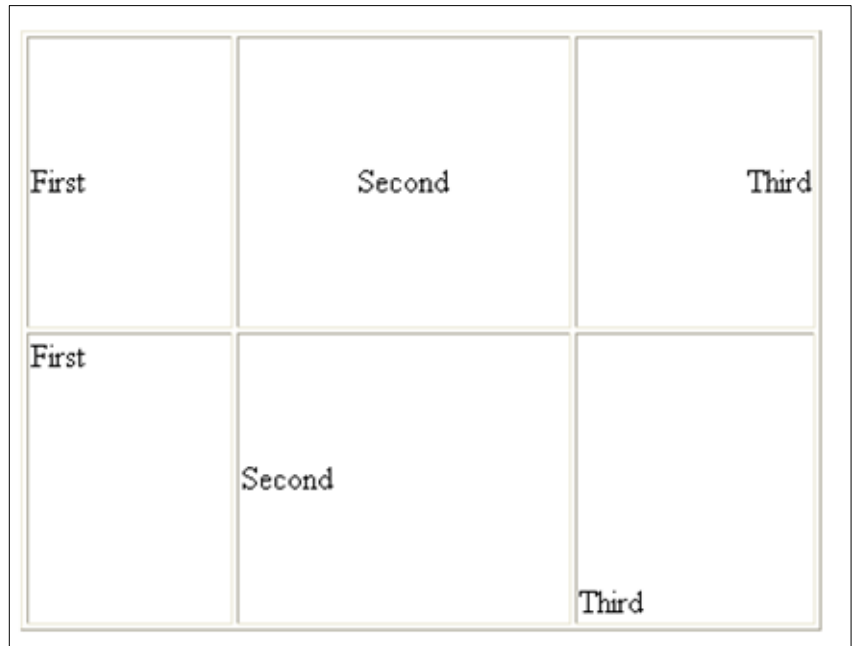

```
<html>
<body>
<h4>With frame="vsides":</h4>
<table frame="vsides">
<tr><td>First</td><td>Row</td></tr>
<tr><td>Second</td><td>Row</td></tr>
</table>
<h4>With frame="lhs":</h4>
<table frame="lhs">
<tr><td>First</td><td>Row</td></tr>
<tr><td>Second</td><td>Row</td></tr>
</table>
<h4>With frame="rhs":</h4>
<table frame="rhs">
<tr><td>First</td><td>Row</td></tr>
<tr><td>Second</td><td>Row</td></tr>
</table>
</body>
</html>
```

**<table frame="rhs ' lhs ' vsides ' hsidess ' below ' above,void ' box 'border">**

With frame="vsides":

```
First | Row
Second| Row
```

With frame="lhs":

```
First | Row
Second| Row
```

With frame="rhs":


```
First | Row
Second| Row
```

*Bay*



<ul>,<li>


```
<html>
<body>
<ul>
<li>Coffee</li>
<li>Milk</li>
</ul>
</body>
</html>
```

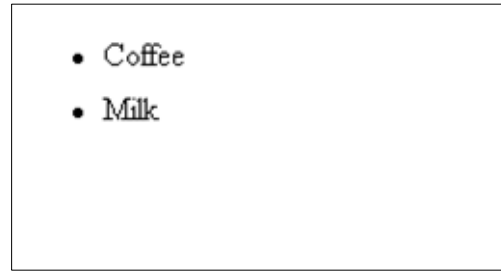

<ul>,<li>


<table>

```
<html>
<body>
<ul>
<li><p>This is a paragraph. This is a paragraph.</p></li>
<li><table border="1"><tr>
<td>row 1, cell 1</td>
<td>row 1, cell 2</td>
</tr><tr>
<td>row 2, cell 1</td>
<td>row 2, cell 2</td>
</tr></table></li>
</ul>
</body>
</html>
```

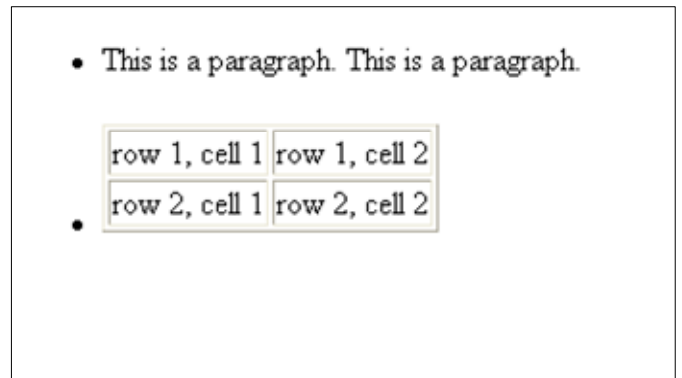


<ol>,<li>

```
<html>
<body>
<ol>
<li>Coffee</li>
<li>Milk</li>
</ol>
</body>
</html>
```

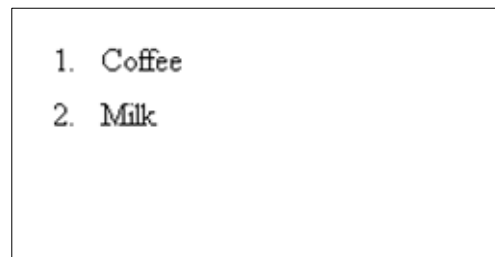

<dl>,<dt>,<dd>

```
<html>
<body>
<dl>
<dt>Coffee</dt>
<dd>Black hot drink</dd>
<dt>Milk</dt>
<dd>White cold drink</dd>
</dl>
</body>
</html>
```

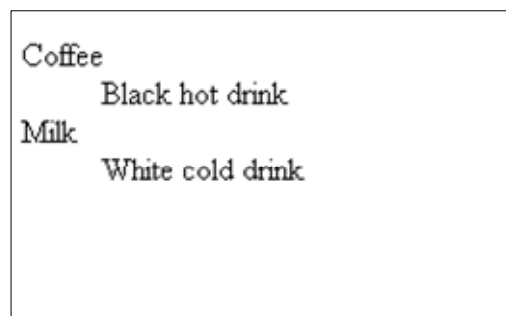

### <ul type=" " >

```
<html>
<body>
<h4>Square bullets list:</h4>
<ul type="square">
<li>Apples</li>
<li>Bananas</li>
<li>Lemons</li>
<li>Oranges</li>
</ul>
</body>
</html>
```

#### Square bullets list:

- Apples
- Bananas
- Lemons
- Oranges

### <ol type=" " >

```
<html>
<body>
<h4>Roman numbers list:</h4>
<ol type="I">
<li>Apples</li>
<li>Bananas</li>
<li>Lemons</li>
<li>Oranges</li>
</ol>
</body>
</html>
```

#### Roman numbers list:

- I. Apples
- II. Bananas
- III. Lemons
- IV. Oranges

### <ul>...<ul>...</ul>....</ul>

استفاده از حلقه تو در تو

```
<html>
<body>
<ul>
<li>Coffee</li>
<li>Tea
<ul>
<li>Black tea</li>
<li>Green tea</li>
</ul>
</li>
<li>Milk</li>
</ul>
</body>
</html>
```

- Coffee
- Tea
  - Black tea
  - Green tea
- Milk

### <form>

<type="text">

### استفاده از فرم در HTML

```
<html>
<body>
<form>
First name:
<input type="text" name="firstname"><br>
Last name:
<input type="text" name="lastname">
</form>
</body>
</html>
```

First name:   
Last name:

<form>  
**<type="radio" checked>**


```
<html>
<body>
<form>
<input type="radio" name="s" value="male"> Male<br>
<input type="radio" name="s" value="female" checked>
Female
</form>
</body>
</html>
```



A screenshot of a web form containing two radio buttons. The first radio button is labeled 'Male' and is unselected. The second radio button is labeled 'Female' and is selected, indicated by a filled circle.

<form>  
**<type="checkbox" checked>**


```
<html>
<body>
<form>
<input type="checkbox" name="bike">
I have a bike<br>
<input type="checkbox" name="car" checked>
I have a car
</form>
</body>
</html>
```

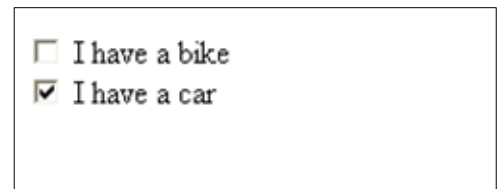

A screenshot of a web form containing two checkboxes. The first checkbox is labeled 'I have a bike' and is unselected. The second checkbox is labeled 'I have a car' and is selected, indicated by a checked box.

<form>  
**<type="password">**

```
<html>
<body>
<form>
Username:
<input type="text" name="user"><br>
Password:
<input type="password" name="pass">
</form>
</body>
</html>
```

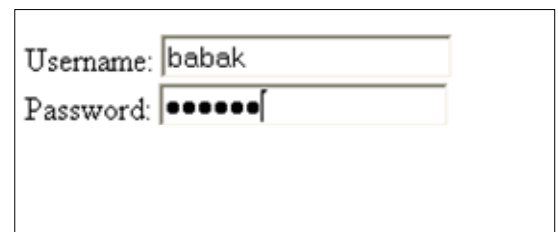


A screenshot of a login form. It has two input fields. The first is labeled 'Username:' and contains the text 'babak'. The second is labeled 'Password:' and contains a series of dots, indicating a masked password.

<type="button">  
**<button>**

از دو روش میشود استفاده کرد.

```
<html>
<body>
<form>
<input
type="button" value="Button 1">
<br><br>
<button>Button 2</button>
</form>
</body>
</html>
```

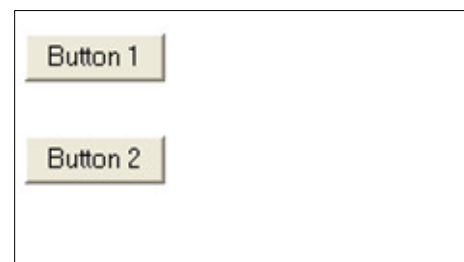


A screenshot of a web form containing two buttons. The first button is labeled 'Button 1' and the second button is labeled 'Button 2'.

**<select name=" " >**

**<caption value=" " >**

```
<html>
<body>
<form>
<select name="cars">
<option value="benz">Benz
<option value="volvo">Volvo
<option value="fiat">Fiat
<option value="audi">Audi
</select>
</form>
</body>
</html>
```

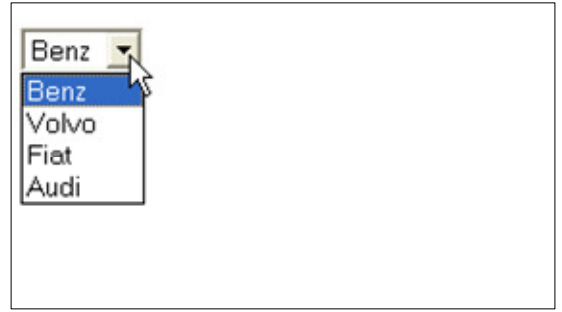

**<select name=" " >**

**<caption value=" " >**


```
<html>
<body>
<form>
<textarea name="text1" rows="5" cols="20">
The cat was playing in the garden.
</textarea>
</form>
</body>
</html>
```



```
<html>
<body>
<fieldset>
<legend>Health information:</legend>
<form>
Height
<input type="text" size="5">
Weight
<input type="text" size="8">
</form>
</fieldset>
</body>
</html>
```

**<fieldset>**


**<legend>**

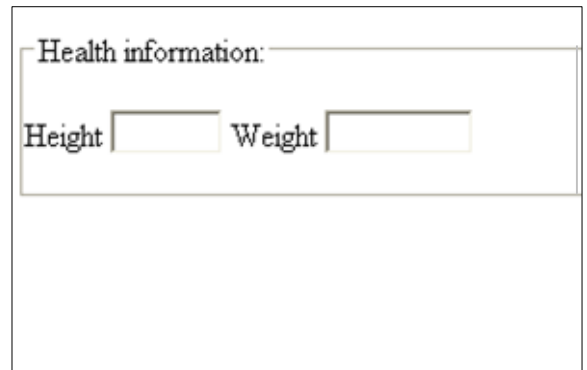

**<input action=" " >**

**Use With ASP**


```
<html>
<body>
<formname="input" action="action.asp" method="get">
Username:
<input type="text" name="user">
<input type="submit" value="Submit">
</form>
</body>
</html>
```

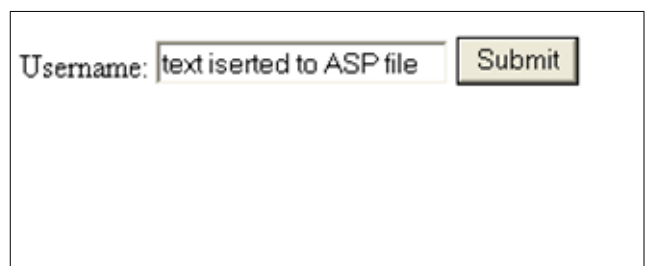

**<frameset cols=" " ">**

**<frame src=" " ">**

```
<html>
<frameset cols="33%,33%,33%">
<frame src="1.html">
<frame src="sunset.jpg">
<frame src="winter.jpg">
</frameset>
</html>
```

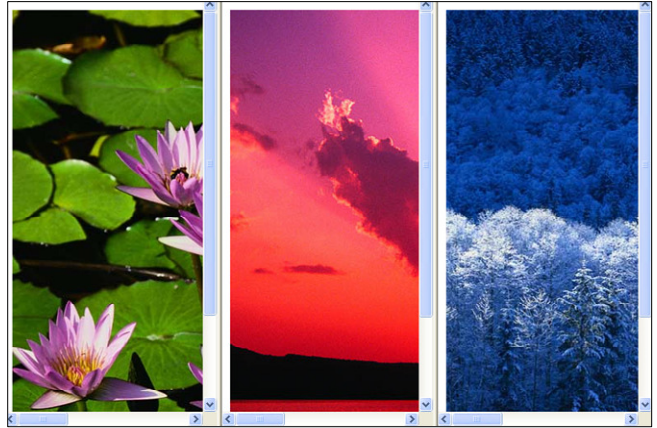

**<frameset rows=" " ">**


**<frame src=" " ">**

```
<html>
<frameset rows="33%,33%,33%">
<frame src="1.html">
<frame src="sunset.jpg">
<frame src="winter.jpg">
</frameset>
</html>
```



**<iframe src=" " ">**


```
<html>
<body>
<iframe src="1.jpg" width=400
height=250>
</iframe>
<pre>Some older browsers don't support
iframes.If they don't, the iframe will not be
visible.
</body>
</html>
```

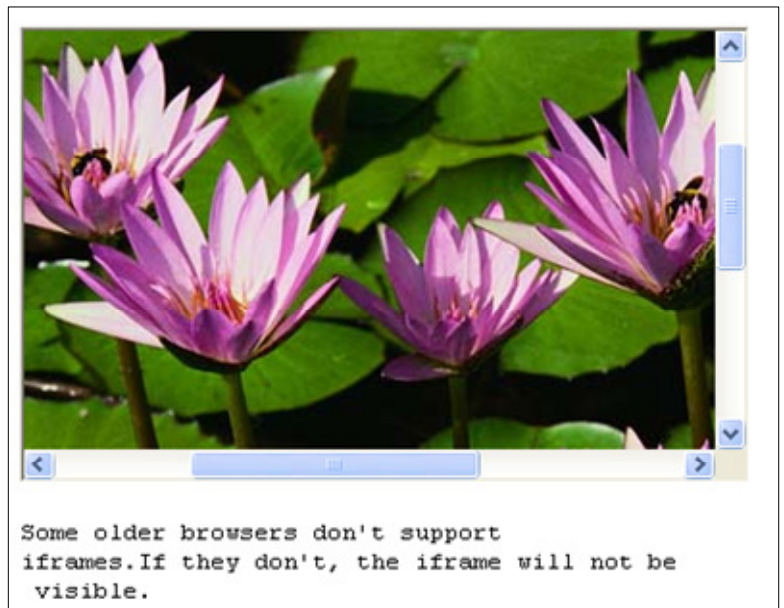

<frameset cols=" " >

<frameset rows=" " >

```
<html>
<frameset rows="50%,50%">
<frame src="1.html">
<frameset cols="25%,75%">
<frame src="sunset.jpg">
<frame src="winter.jpg">
</frameset></frameset>
</html>
```

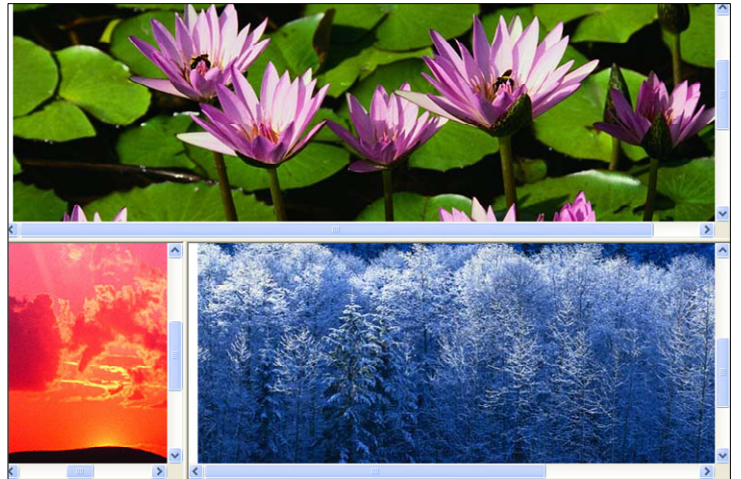

<frameset cols="number.\*%" >

<frameset rows="number.\*%" >

```
<html>
<frameset cols="120,*%">
<frame src="sunset.jpg">
<frame src="winter.jpg" name="showframe">
</frameset>
</html>
```



www.freebay.ir

```
<HTML>
<HEAD>
<TITLE>My Home Page</TITLE>
<base target="_blank">
</HEAD>
<BODY>
<a href="http://www.yahoo.com">Yahoo Site.</a>
</BODY>
</HTML>
```

<head> برچسب‌هایی که درون برچسب قرار میگیرند </head>

- <title>
- <base>
- <meta>
- <link>
- <style>
- <script>

```
= <a href="http://www.yahoo.com" target="_blank">Yahoo Site.</a>
<a href="http://www.yahoo.com">Yahoo Site.</a>
```

```
<HTML>
<HEAD>
</HEAD>
<BODY>
<script type="text/javascript">
document.write("Hello World!")</script>
</BODY>
</HTML>
```

